Part 2

C·O·S·T ENGINEERING II™

Economics of Satellites, Rockets and Space Organizations

Lecture Series given by Dr.-Ing. Robert Alexander Goehlich

- Part 2: Basics about Orbital Mechanics and Design of Satellites -

Content

- **General**
- **Satellite Science**
  - Ideal Rocket Equation
  - Solar System
  - Newton‘s Laws
  - Kepler‘s Laws
- **Definition**
  - Cost Engineering (Practice V)
- **Requests from Audience for Lectures**

General
Goal of Today‘s Lecture

„You will learn about basics of satellite science and do some exercises with selected examples.“

General
Contact

Dr.-Ing. Robert Alexander GOEHLICH
Mobile: +81-(0)90 1767 1667
Fax: +81-(0)45-566-1778
Email: mail@robert-goehlich.de
Internet: www.robert-goehlich.de

Mr. Akihiko Hara (Teaching Assistant)
Mobile: n.a.
Email: chicago@doi.ics.keio.ac.jp

Mr. Sindharta Tanuwijaya (Webmaster)
Mobile: n.a.
Email: zaraasran@yahoo.com

Keio University
Department of System Design Engineering
(Space System Engineering)
Office 14-609/14-620
3-14-1 Hiyoshi
Kohoku-ku
Yokohama 223-8522
JAPAN

Rocket Equation

$$\Delta p_{exhaust} = dM(u+v)$$
$$\Delta p_{rocket} = (M - dM)\,du$$
$$dM(u+v) = (M - dM)\,du \approx M\,du$$
$$M\,du + dM = 0 \quad \text{if} \quad u \ll v$$
$$du = -v\frac{dM}{M}$$
$$\int_{u_0}^{u} du = -v\int_{M_0}^{M}\frac{dM'}{M'}$$

$$u = v\ln\left(\frac{M_0}{M}\right) + u_0.$$

where *u* is the final rocket velocity, *v* is the velocity of the exhaust gases, M_0 *is the starting mass, M* is the ending mass of the rocket and u_0 is the initial rocket velocity prior to the fuel burn. This equation was published by Tsiolkovsky in 1903.

Rocket Equation

Major On-orbit Events (ADEOS-II)

Event	Time passed after liftoff	Revolution(s)	Visible station(s)	Note
1) 2nd stage/ADEOS-II separation	00 hour(s) 15minutes	0	—	Automatic sequence
2) Paddle deployment	00 25	0	Perth	Automatic sequence
3) Paddle sun acquisition start	01 33	1	KTCS, MTCS, OTCS	Real command
4) SeaWinds anchorage	12 15	7	KTCS, MTCS, OTCS	Stored command
5) IOCS deployment 1	13 01	8	MTCS, OTCS	Real command
6) IOCS deployment 2	23 36	14	KTCS, MTCS, OTCS	Real command
7) Move to normal control mode	25 18	15	KTCS, MTCS, OTCS	Real command

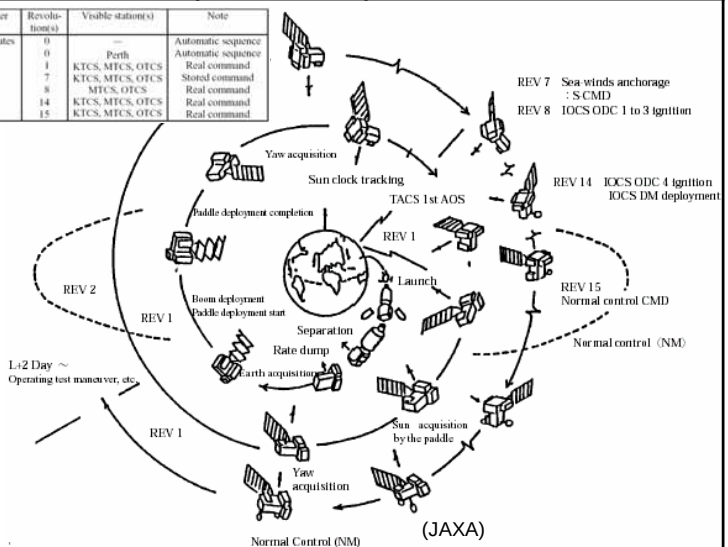

(JAXA)

Rocket Equation

On-orbit Configuration (ADEOS-II)

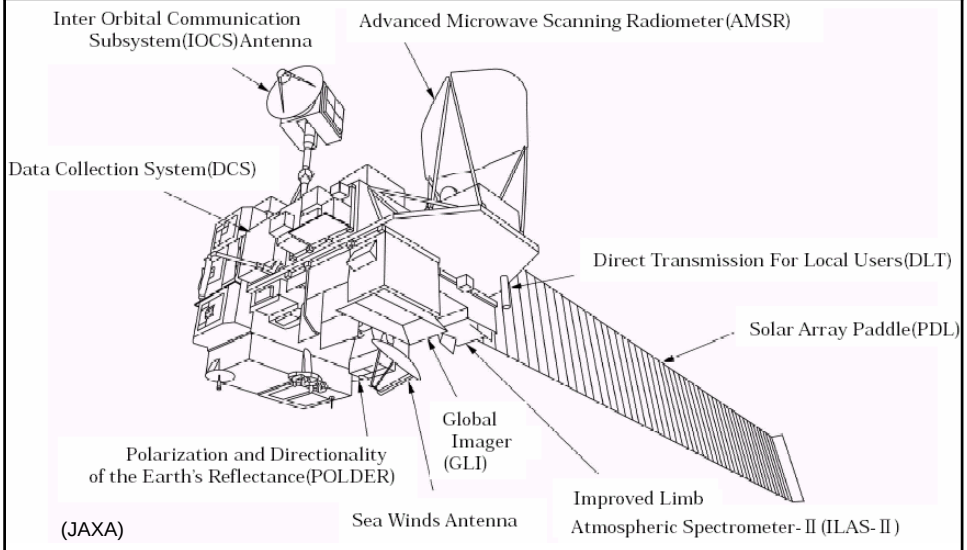

(JAXA)

Rocket Equation

Major Satellite Characteristics (ADEOS-II)

Name	Advanced Earth Observing Satellite -II (ADEOS-II)
Orbit	Category: Sun-synchronous subrecurrent orbit Altitude: 802.92 km Inclination: 98.62 degrees Period: 101 minutes Recurrent period: 4 days Number of recurrence: 14 +1/4 revolutions/day Orbits per Recurrent: 57 revolutions Local time at descending node: 10:30 +/- 15 minutes Minimum inter-orbital distance: 703.07 km(over the equator) Recurrent accuracy: +/- 5 km
Configuration Size	A box shape with a solar array paddle, and antennas for Advanced Microwave Scanning Radiometer (AMSR), Inter Orbital Communication Subsystem (IOCS), and Data Collection System (DCS) Main body: 4m x 4m x 6m Solar array paddle: 3m x 24m
Mass	3.68 tons
Power generation	More than 5,359W (EOL)
Mission life	3 years

(JAXA)

Rocket Equation

HII-A F4 Satellites Separation

No. 9

(movie)

Solar System

No. 10



Sun

Mercury

Venus

Earth



Mars

Asteroids

Jupiter

Saturn



Uranus



Neptune

Pluto

Newton‘s Laws

No. 11

1. Every body continues in a state of rest, or of uniform motion in a straight line, unless it is compelled to change that state by forces impressed upon it.



2. The change of motion (linear momentum) is proportional to the force impressed and is made in the direction of the straight line in which that force is impressed.

$$F = ma$$

3. To every action there is always an equal and opposite reaction; or, the mutual actions of two bodies upon each other are always equal, and act in opposite directions.

Kepler‘s Laws

No. 12

1. If two bodies interact gravitationally, each will describe an orbit that is a conic section about the common mass of the pair. If the bodies are permanently associated, their orbits will be ellipses. If they are not permanently associated with each other, their orbits will be hyperbolas (open curves).



2. If two bodies revolve around each other under the influence of a central force (whether or not in a closed elliptical orbit), a line joining them sweeps out equal areas in the orbital plane in equal intervals of time.



3. Stating that the ratio of the square of the revolutionary period (in years) to the cube of the orbital axis (in astronomical units) is the same for all planets

$$T_a^2 / T_b^2 = R_a^3 / R_b^3$$



Example
New Markets: Madmen in Space

(SpaceWorks Engineering)

Example
New Markets: Madmen on Surface

(SpaceWorks Engineering)

Definition

Definition of Cost Engineering (Practice V)

Case C

- *Step 5: Discuss within your team the consequences of lower performance (= less payload) from an economical approach.*

Dr.-Ing. Robert Alexander GOEHLICH
Keio University
Department of System Design Engineering
Space System Engineering
3-14-1 Hiyoshi, Kohoku-ku
Yokohama 223-8522, JAPAN
email: mail@robert-goehlich.de
Mobile: +81-(0)90-1767-1667
Fax.: +81-(0)45-566-1778
Internet: http://www.robert-goehlich.de